

Since 1990

The Ideal Quality
**SHOWER
PRODUCTS**

FACO INDUSTRIES, has been engaged in manufacturing of high quality HOSES in assortment of sizes and specially designed to cater the need of Shut-off Showers, Hand Showers and variety of water connections with the assistance of German & Korean Technology.

Our hoses are being produced as per EN-1113, EN-13618 and EN-248 standards and are 100% anti-microbial, safe for drinking water and water coming in contact with human body. FACO's Quality Management System is ISO 9001-2000 and has been successful in gaining international Quality Certifications, including ACS, WRAS, NSF and KTW-W270.

Our shower products that includes Shut-off Showers, Hand Showers and Head Showers are also made on International Standards by all means and are attractively acceptable to all quality conscious countries.

With our experience, spanning over three decades, coupled with supreme quality of products FACO is today Pakistan's largest exporter of above products to Middle East, Far East, Europe etc.

Should you find interest in our products, please do not hesitate to seek any further details of your interest.


Interlock hose is produced by spirally winding a precision slit metal strip so that the edges 'interlock' to form a seamless length in a configuration, size and type custom design for each specific application.

The interlock hose itself can be manufactured from a variety of materials including Aluminum, Galvanized Steel, Stainless Steel, Brass, Monel, or Inconel, depending on the application. Outer diameters range from 12mm to 18mm.

01


SINGLE INTERLOCK

In single interlock the metal strip and the edge of the strip form a square type interlock profile. This offers good crush protection and tensile strength i.e. >500N.

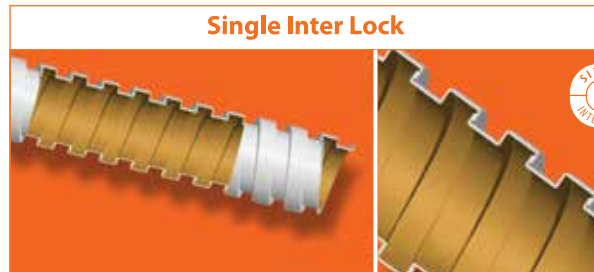


DOUBLE INTERLOCK

In double interlock the metal strip and the edges of the strip are completely interlocked with each other which form a double interlock profile. This offers increased crush protection and higher tensile strength i.e. >900N.

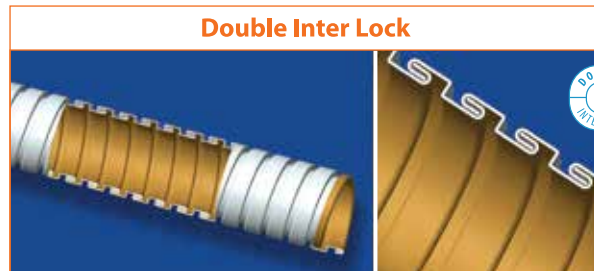



Chromium Plated Metal Shower Hose

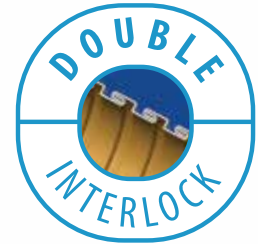

02

Material	Brass or Stainless Steel	Technical Specification Dynamic Pressure 0,5 bar to 7,5 bar Temperature $\leq 70^{\circ}\text{C}$ Tensile Strength 900 N Flow Rate $\geq 0,54$ l/seconds Ni-Cr Coatings Intensity Range 700 ~ 1,000 Lux
Diameters	OD: 14.00mm ID: 8.00mm	

Chromium Plated Metal Shower Hose

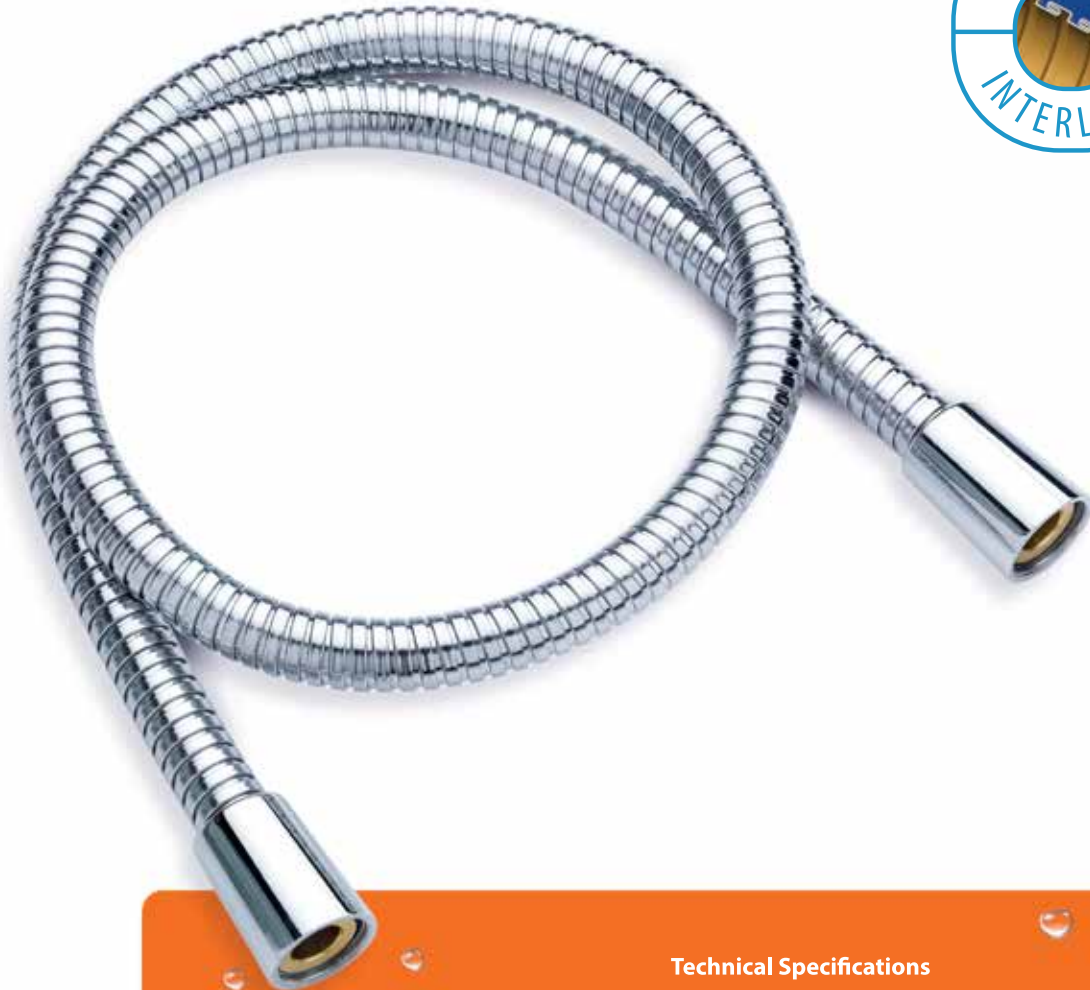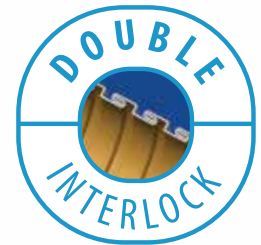

03

Material Brass or Stainless Steel
Diameters **OD:** 16.00mm **ID:** 11.00mm

Technical Specifications

Dynamic Pressure	0,5 bar to 5,0 bar
Temperature	≤ 70 °C
Tensile Strength	900 N
Flow Rate	≥ 0,74 l/seconds
Ni-Cr Coatings	Intensity Range 700 ~ 1,000 Lux

Corrugated PVC Shower Hose

**CHROME
FINISH**



04

Diameters	OD: 14.00mm ID: 6.25mm
Profile Structure	5 Layers

Technical Specifications	
Dynamic Pressure	0,5 bar to 5,0 bar
Temperature	≤ 70 °C
Tensile Strength	500 N
Flow Rate	≥ 0,42 l/seconds

Silver PVC Shower Hose



05

Diameters	OD: 14.00mm ID: 6.25mm
Profile Structure	5 Layer Plain
Technical Specifications	
Dynamic Pressure	0,5 bar to 5,0 bar
Temperature	≤ 70 °C
Tensile Strength	500 N
Flow Rate	≥ 0,42 l/seconds

Metal Connection Hose



06



Material		Stainless Steel	
Diameters	OD: 12.00mm ID: 5.75mm		
Inner Tube	PEX		

Technical Specifications	
Dynamic Pressure	0,5 bar to 10,0 bar
Temperature	≤ 70 °C
Tensile Strength	500 N
Flow Rate	≥ 0,40 l/seconds

Metal Flexible Hose



07

Material		Stainless Steel
Diameters	OD: 14.00mm ID: 5.75mm	
Inner Tube		PEX

Technical Specifications	
Dynamic Pressure	0,5 bar to 10,0 bar
Temperature	≤ 70 °C
Tensile Strength	500 N
Flow Rate	≥ 0,40 l/seconds

SHUT-OFF SHOWER SETS

with Chromium Plated Metal Shower Hose

Smart

Echo

Bold

08



SHUT-OFF SHOWER SETS

with Chromium Plated Metal Shower Hose

Aqua



Eros



Vigo



09

HAND SHOWER SETS

with Chromium Plated Metal Shower Hose

Artic

Spring


Gloria

10





One Function
HEAD SHOWER

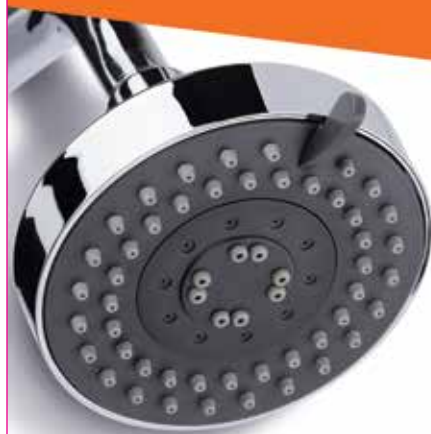

Five Functions
HEAD SHOWER

Rain Shower

8 x 8 INCH



Nuts / Inserts



C.P. Brass Hexagonal Nut



C.P. ABS Hexagonal Nut



C.P. Brass Half Knurled Round Nut



C.P. Brass Full Knurled Round Nut



C.P. Brass Lined Round Nut



C.P. ABS Knurled Conical Nut



White ABS Knurled Conical Nut



C.P. Brass Knurled Long Conical Nut



C.P. Brass O-ring Conical Nut



C.P. Brass Plain Conical Nut



C.P. Brass Plain Conical Nut With Cut



C.P. Brass Bidet Nozzle



C.P. Brass Threaded Nipple



C.P. ABS Plain Conical Nut



C.P. Brass Knurled Conical Nut



Nylon Cap
6.25 mm
S/C 14 mm



Nylon Cap
8.00 mm
D/C 14 mm



Brass Cap with Washer
6.50 mm
S/C 14 mm



Brass Cap
8.00 mm
D/C 14 mm



Log-off
8.00 mm
D/C 14 mm



Log-off
11.00 mm
D/C 16 mm



Brass Cap Thread Type
8.00 mm
D/C 14 mm



Brass Cap with O-ring
8.00 mm
D/C 14 mm



Brass Cap
1.00 mm
D/C 16 mm



Brass Cap Std-type
13.00 mm
D/C 18 mm

PACKAGING



Bulk Packing



Card+Poly Bag



Sealed Poly Bag



Single Blister



Double Blister



Shut Off Shower Box



Hand Shower Box





Rain Shower Box



Master Carton
54x36x20cm

PRODUCTION FACILITIES

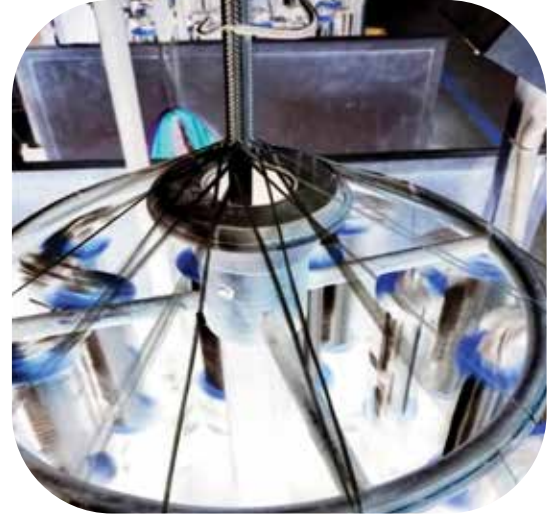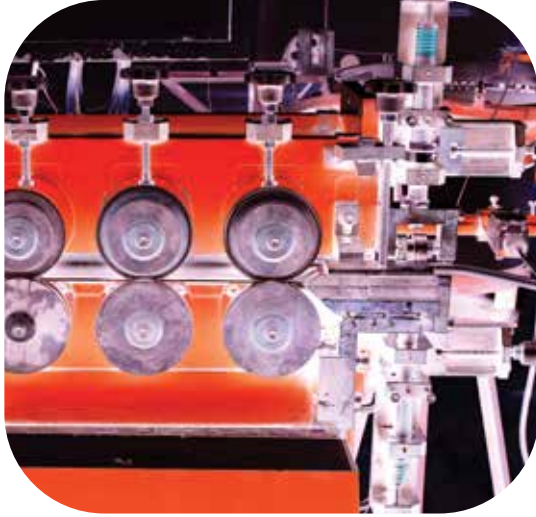

14



PRODUCTION FACILITIES







FACO INDUSTRIES IS LOCATED AT PORT CITY OF KARACHI, PAKISTAN.



FACO INDUSTRIES

Office

204, Bank & Business Centre
Near Duty Free Shop
Off. Shakra-e-Faisal
Karachi-75350. Pakistan
Tel: +92 21-34523096
Fax: +92 21-34526898

Factory

D-155, Block-5
Federal-B-Area
Karachi-75950. Pakistan
Tel: +92 21-36341841~2
Fax: +92 21-36361057

General Inquiry

info@faco.com.pk

Sales Inquiry

sales@faco.com.pk

www.faco.com.pk